

POWER-GRID SWITCHGEARS PVT. LTD.

(Vyas Group Of Companies)

- NSIC - CRISIL RATting : SE 3 B
- NSIC - ICRA RATting : SE 3 B
- C E MARKED PRODUCT

MANUFACTURERS, EXPORTER & ENGINEERS

- * Load Break Switch
- * Overhead Line Material
- * Hightension Switchgears
- * Earthing Materials
- * Sub-Station Equipments,
- * Street Light Pole

Regd. Office : : 1885, Pada Pole, Gandhi Road, Ahmedabad-380 001.
Administration Office : : "National House" 1885, Pada Pole, Gandhi Road, Ahmedabad-380001. Gujarat (India)
Factory (1) : Plot No.8/1, Sanket Industrial Estate, Village-Moraiya, (Changodar)Sarkhej-Bawla Highway, Tal.-Sanand, Dist-Ahmedabad-382213. Gujarat, (India) Ph. 02717-297827
Factory (2) : 34/45, Sonal Industrial Estate, At & Post-Khoda, Nr. TATA Nano, Tal. Sanand. Pin. 382170. Gujarat, India
Tele/Fax : 079-22139725-22169725
Mobile : Jayant : +91 9879559725 • Kaushik : +91 9879529725
E-mail : jayant1885@gmail.com, national9725@gmail.com, kgvyas33@gmail.com
Website : www.electroverhead.com, www.nationalpower.in

- ☞ **Substation Equipments :**
GOAB Switches, Load Break Switches (LBS), Isolator, Single Phase Switch, Disconnecting Switch, Drop Out Fuses, Horn Gap Fuses, Operating Rod, Discharging Rod, Lightning Arresters, Fuse Elements.
- ☞ **TRANSMISSION LINE MATERIAL :**
ACSR-AAAC Conductor, Tension / Suspension Hardware, Stay Sets, Stay Wire, G.I. Wire, Earthwire, Shackle Straps, Nut Bolts and Spindle, PG Clamps and Connectors etc.
- ☞ **Porcelain Insulators / Bushing :**
HT and LT Porcelain Insulators, Disc, Pin, Shackle, Reel, Epoxy Insulators, Crain Insulators, Busbar Supporters.
- ☞ **Composite Insulators (Up to 400Kv) :**
(silicon-Polymers) - Suspension - Pillar - Pin - Post
- ☞ **Earthing Material (G. I. & Copper) :**
Plates, Pipes, Strips, Funnel, Covers & Maintenance Free Electrode
- ☞ **Cable Jointing Kit & Accessories :**
Heat Shrinkable type, Resin Cast, Push on type, Tapex type and Compounds
- ☞ **Safety Products :**
Rubbers Sheets, Hand Gloves, Shoes, Caution Board, Shock Treatment Charts, Safety Belt, Fire Bucket, Fire Stand, First Aid Box, Fire extinguisher, Jacket.
- ☞ **LT and HT types of Taps :**
Cotton, PVC, Fibre, Empire, Mastic, Rubber, Self Amalgamating, Teflon, Black Million
- ☞ **Street Light Pole :**
Steel Tubular Pole, High Mast Pole, Decorative Lamp Pole, Solar Pole
- ☞ **Transformer :**
Distribution, Power, Oil Cooled, Dry, Furnace, Rectifier, Earthing, Welding, Booster, Isolation and any other special Type.
- ☞ **11 / 22 / 33 KV. CT. PT. Metering Sets :**



We have been awarded with the **7 National**
and **3 International** award for Best **Quality** and **Management**

“NATIONAL” The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.

(Vyas Group Of Companies)

- NSIC - CRISIL RATING : SE 3 B
- NSIC - ICRA RATING : SE 3 B
- C E MARKED PRODUCT

MANUFACTURERS, EXPORTER & ENGINEERS

- * Load Break Switch
- * Overhead Line Material
- * Hightension Switchgears
- * Earthing Materials
- * Sub-Station Equipments,
- * Street Light Pole

Regd. Office : : 1885, Pada Pole, Gandhi Road, Ahmedabad-380 001.

Administration Office : "National House" 1885, Pada Pole, Gandhi Road, Ahmedabad-380001. Gujarat (India)

Factory (1) : Plot No.8/1, Sanket Industrial Estate, Village-Moraiya, (Changodar)Sarkhej-Bawla Highway, Tal.-Sanand, Dist-Ahmedabad-382213. Gujarat, (India) Ph. 02717-297827

Factory (2) : 34/45, Sonal Industrial Estate, At & Post-Khoda, Nr. TATA Nano, Tal. Sanand. Pin. 382170. Gujarat, India

Tele/Fax : 079-22139725-22169725

Mobile : Jayant : +91 9879559725 • Kaushik : +91 9879529725


E-mail : jayant1885@gmail.com, national9725@gmail.com, kgvyas33@gmail.com

Website : www.electrooverhead.com, www.nationalpower.in




“NATIONAL” The Name of Quality


POWER-GRID SWITCHGEARS PVT. LTD.

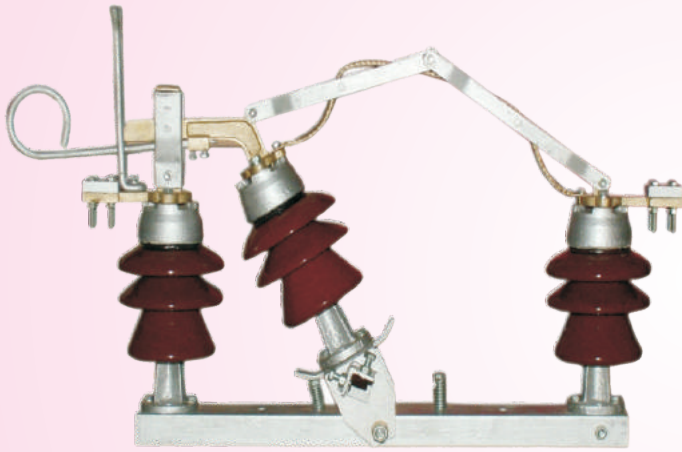


11/22/33 KV Outdoor triple pole Three insulator per pole tilting type, Gang Operated Air Break Switch Suitable for horizontal / vertical mounting with complete operating mechanism.
Test as per IS-9920 / 1985

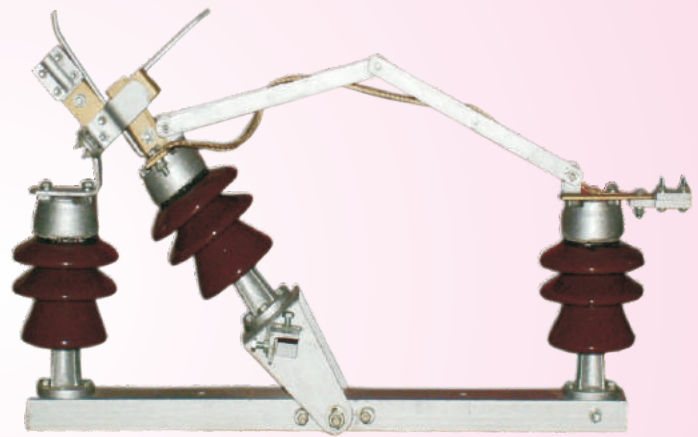


11/22/33 KV Outdoor triple pole Three insulator per pole tilting type, Gang Operated Air Break Switch Suitable for horizontal / vertical mounting with complete operating mechanism.
Test as per IS-9920 / 1985

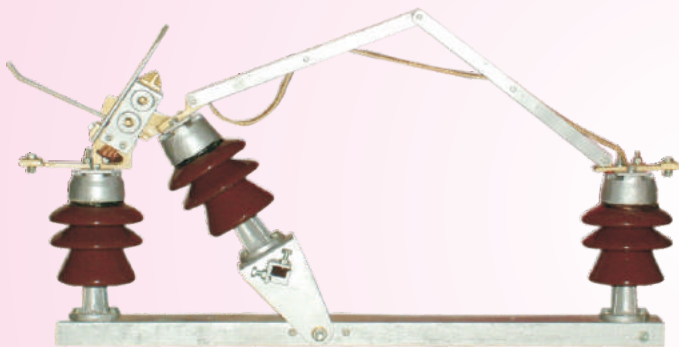


11/22/33 KV Outdoor triple pole Three insulator per pole tilting type, Gang Operated Air Break Switch Suitable for horizontal / vertical mounting with complete operating mechanism.
Test as per IS-9920 / 1985

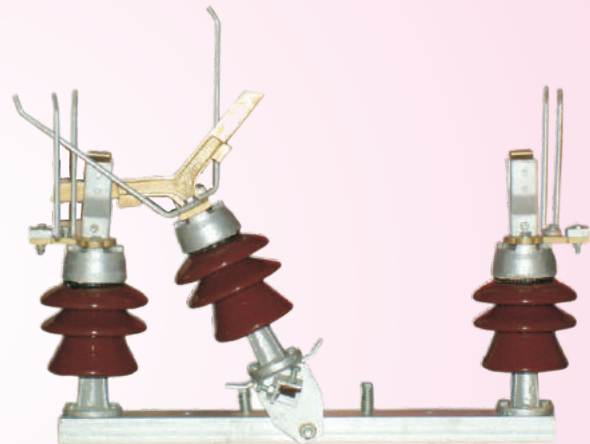

11/22/33 KV Outdoor triple pole Three insulator per pole tilting type, Gang Operated Change Over Switch Suitable for horizontal / vertical mounting with complete operating mechanism.
Test as per IS-9920 / 1985

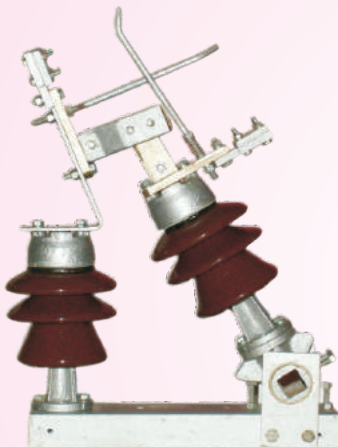


11/22/33 KV Outdoor triple pole Two insulator per pole tilting type, Gang Operated Air Break Switch Suitable for horizontal / vertical mounting with complete operating mechanism.
Test as per IS-9920 / 1985

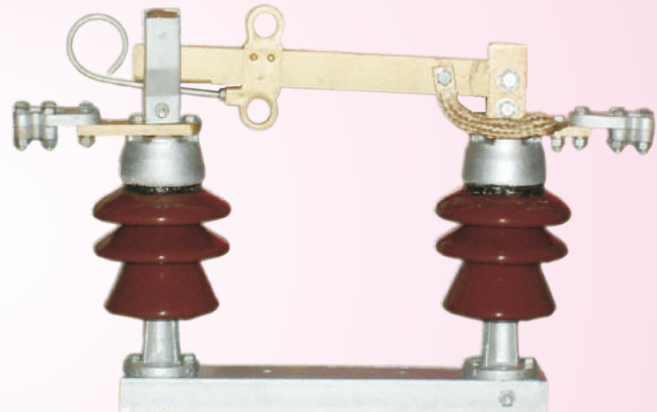


11/22/33 KV Outdoor triple pole Two insulator per pole tilting type, Disconnecting Switch Suitable for horizontal / vertical mounting.
Test as per IS-9920 / 1985

“NATIONAL” The Name of Quality


POWER-GRID SWITCHGEARS PVT. LTD.

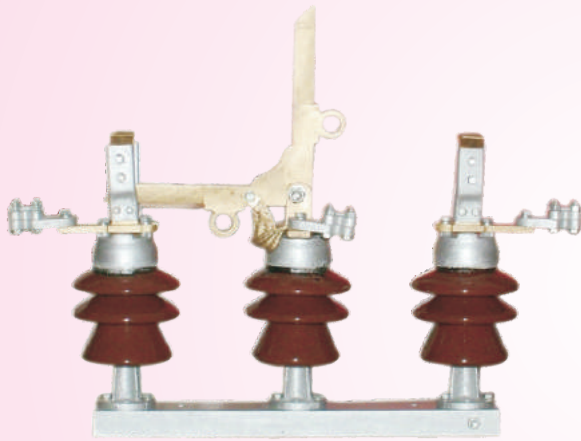


11/22/33 KV Outdoor Three insulator per pole tilting type, Gang Operated Single Phase Switch Suitable for horizontal / vertical mounting.
Test as per IS-9920 / 1985

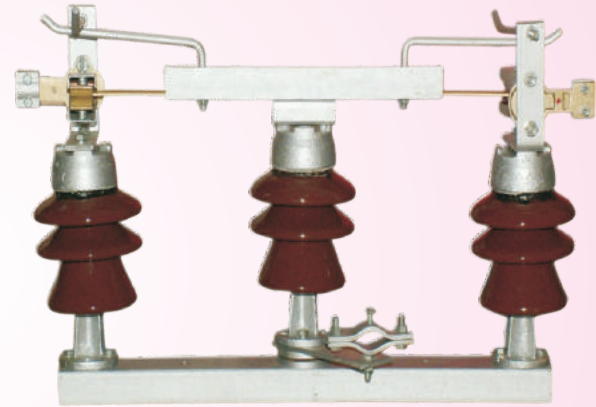


11/22/33 KV Outdoor triple pole Three insulator per pole Rotating type, Gang Operated Air Break Switch Suitable for horizontal mounting with complete operating mechanism.
Test as per IS-9920 / 1985

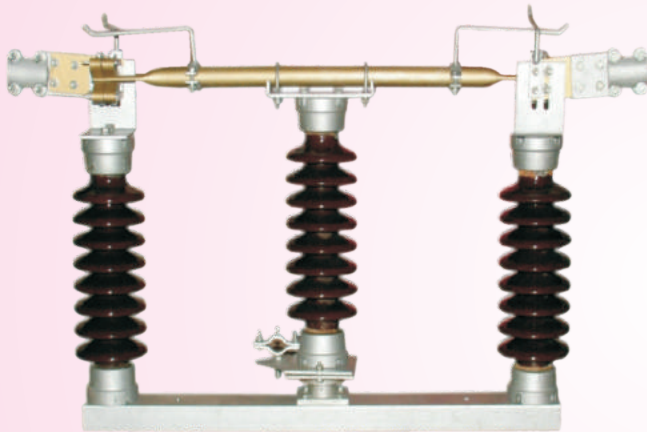

33 KV Outdoor triple pole Three Solidcore insulator per pole Rotating type, Isolator Suitable for horizontal mounting with complete operating mechanism.
Test as per IS-9920 / 1985

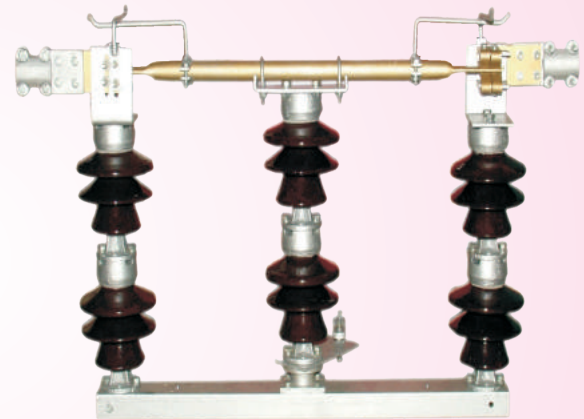

22/33 KV Outdoor triple pole Six insulator per pole Rotating type, Isolator Double Stack of Insulator Suitable for horizontal mounting with complete operating mechanism.
Test as per IS-9920 / 1985

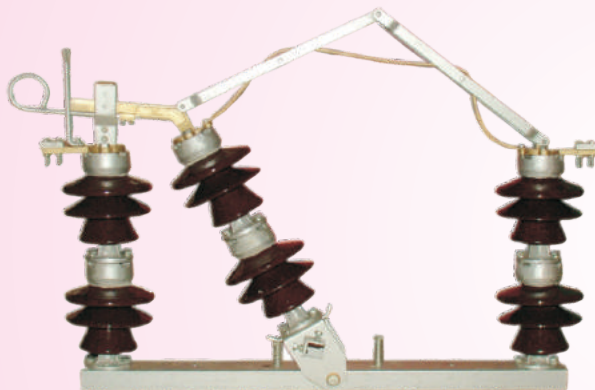

22/33 KV Outdoor triple pole Tilting type, Gang Operated Air Break Switch with Double Stack of Insulator Suitable for horizontal / vertical mounting with complete operating mechanism.
Test as per IS-9920 / 1985

Spares for GOAB Switch



Female Contact



Male Contact



Back Contact




Pentagraph




Copper Flexible Strip

“NATIONAL” The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.

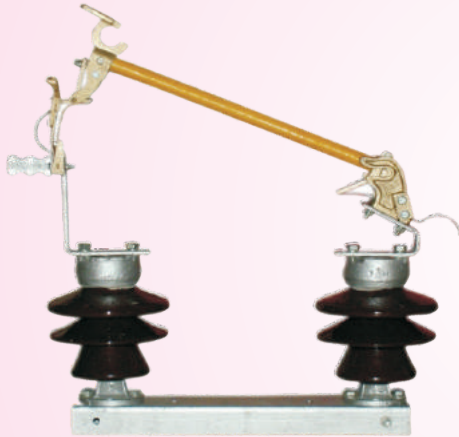

11/22/33 KV Outdoor Expulsion type Drop Out Fuse with channel Base.
Test as per IS-9385/1983

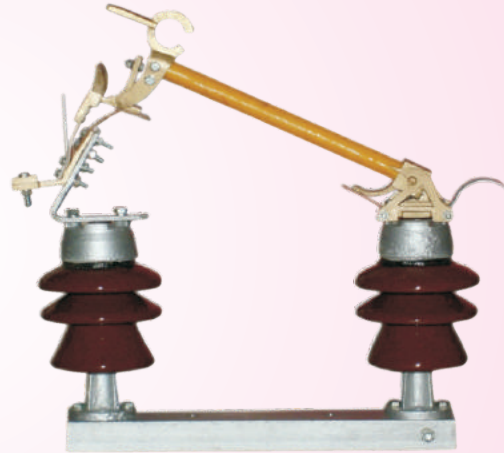


11/22/33 KV Outdoor Expulsion type Drop Out Fuse with channel Base.
Test as per IS-9385/1983



22/33 KV Outdoor Expulsion type Drop Out Fuse with Double Stack of Insulators with channel Base. Test as per IS-9385/1983



22/33 KV Outdoor Expulsion type Drop Out Fuse Solidcore Insulators with channel Base. Test as per IS-9385/1983

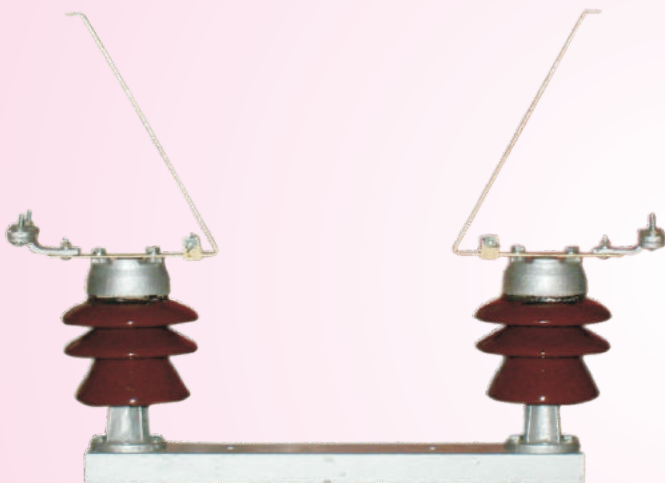

11/22/33 KV Outdoor Horn Gap Type Fuse with channel Base. Test as per IS-9385/1983



11 KV Outdoor Expulsion type Drop Out Fuse with Solidcore Insulators Test as per IS-9385/1983

“NATIONAL” The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.



FRP Operating Rod up to 440 kv.



FRP Discharging Rod up to 440kv.




11 KV Disc Insulator



11/22/33 KV Pin Insulator



11/22/33 KV Post Insulator

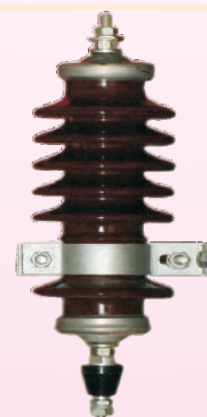

Lightning Arrester up to 400kv Class.

“NATIONAL” The Name of Quality


POWER-GRID SWITCHGEARS PVT. LTD.



Stay Assembly

Stay Wire

G. I. Earthing Material

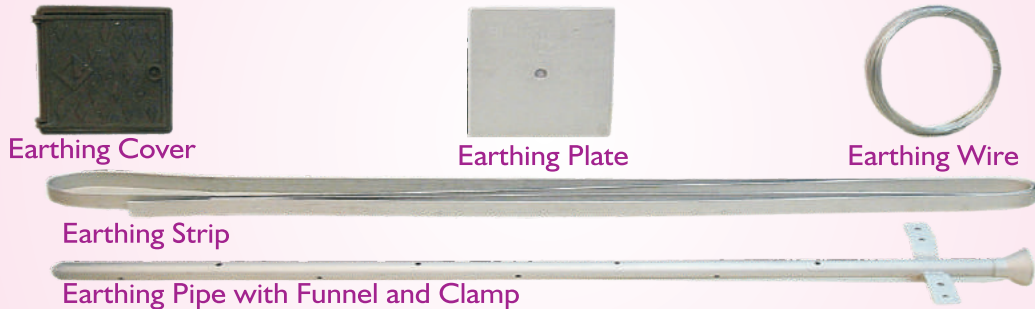

Earthing Cover

Earthing Plate

Earthing Wire

Earthing Strip

Earthing Pipe with Funnel and Clamp

Copper Earthing Material



Copper Wire

Copper Plate

Copper Strip



P. G. Clamp

Connector

Connector

Come Along Clamp



Turn Buckle

G. I. Pin

Disc Fitting (Hardware)

“NATIONAL” The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.



“NATIONAL” The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.



Rubber Sheet



Rubber Hand Gloves



Safety Boot



Fire Bucket with Stand



Safety Belt

Spares for Drop Out Fuse




Top Contact (Supadi)



F. R. P. Tube with Contact



Bottom Contact (Hanse)

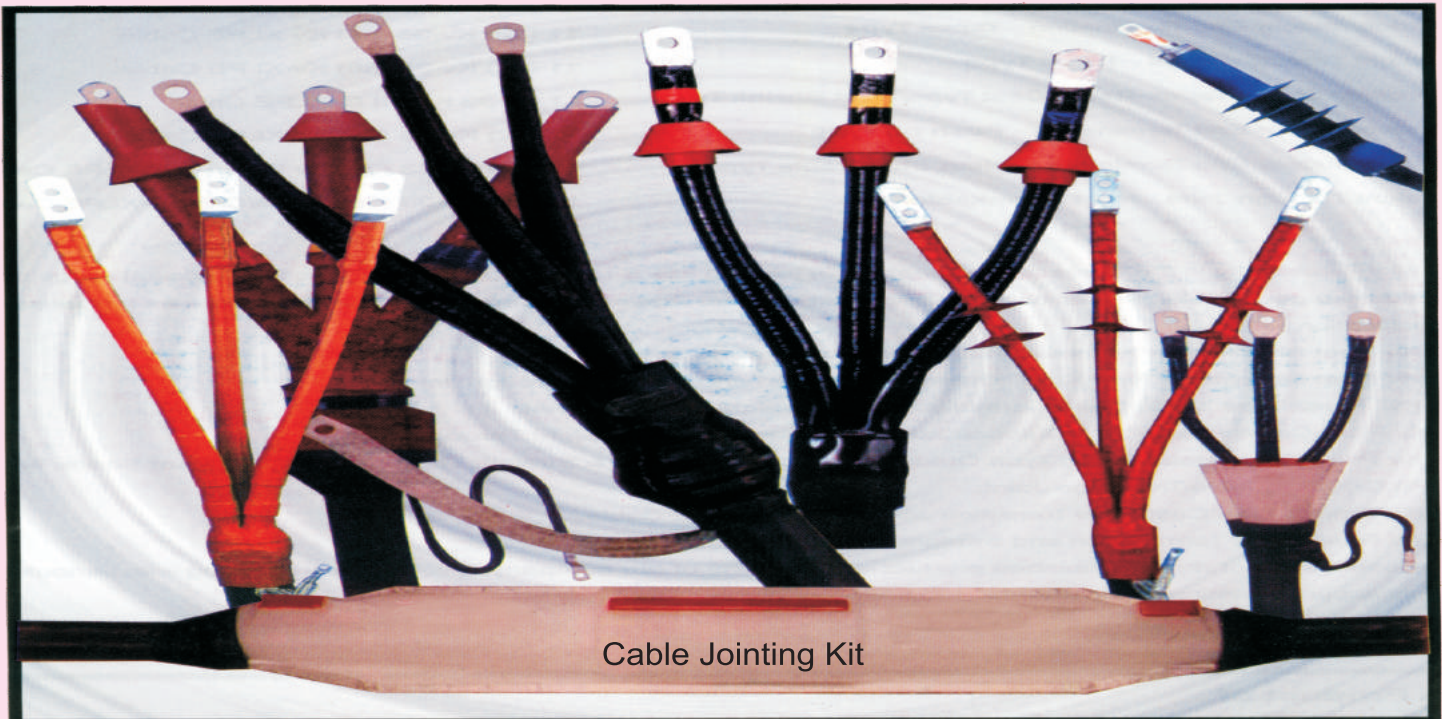

Cable Jointing Kit

“NATIONAL” The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.

(Vyas Group Of Companies)

- **NSIC - CRISIL RATting : SE 3 B**
- **NSIC - ICRA RATting : SE 3 B**
- **C E MARKED PRODUCT**

MANUFACTURERS, EXPORTER & ENGINEERS

- * Load Break Switch
- * Overhead Line Material
- * Hightension Switchgears
- * Earthing Materials
- * Sub-Station Equipments,
- * Street Light Pole

Regd. Office : : 1885, Pada Pole, Gandhi Road, Ahmedabad-380 001.

Administration Office : "National House" 1885, Pada Pole, Gandhi Road, Ahmedabad-380001. Gujarat (India)

Factory (1) : Plot No.8/1, Sanket Industrial Estate, Village-Moraiya, (Changodar)Sarkhej-Bawla Highway, Tal.-Sanand, Dist-Ahmedabad-382213. Gujarat, (India) Ph. 02717-297827

Factory (2) : 34/45, Sonal Industrial Estate, At & Post-Khoda, Nr. TATA Nano, Tal. Sanand. Pin. 382170. Gujarat, India


Tele/Fax : 079-22139725-22169725

Mobile : Jayant : +91 9879559725 • Kaushik : +91 9879529725

E-mail : jayant1885@gmail.com, national9725@gmail.com, kgvyas33@gmail.com









Website : www.electrooverhead.com, www.nationalpower.in

11 kv / 22 kv / 33 kv GOAB Switch, Disconnecting Switch, Isolator & Drop Out Fuse Horngapfuse with Silicone Rubber (Polymer) Insulator

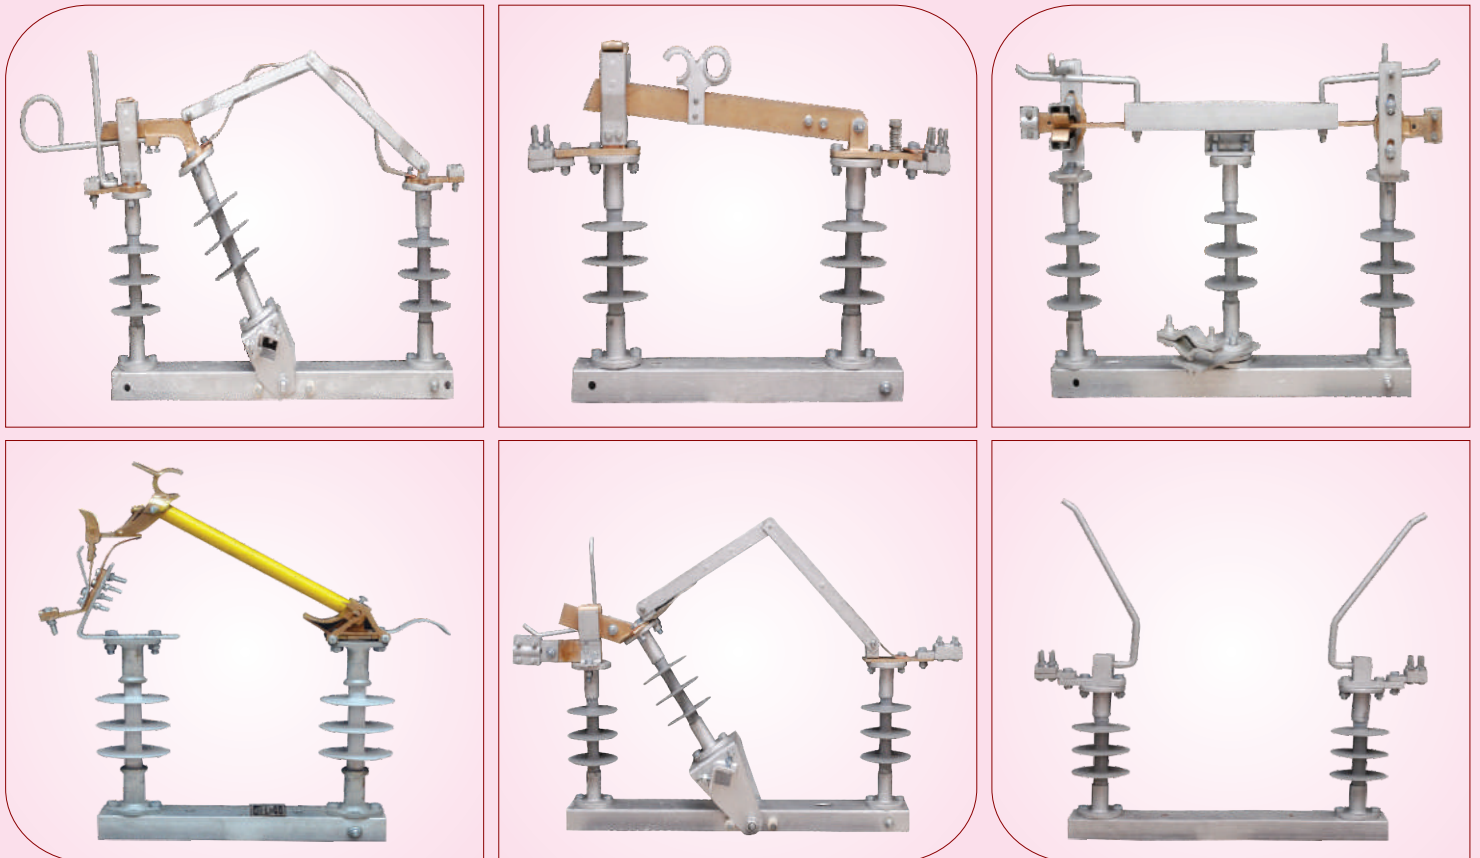

"NATIONAL" The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.

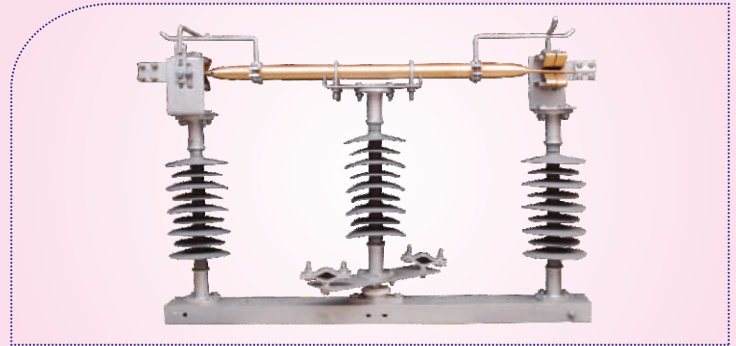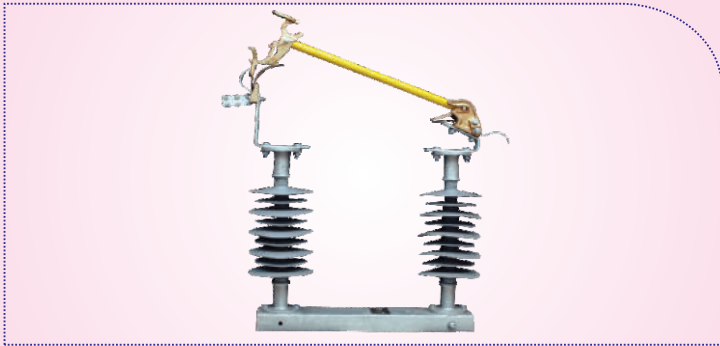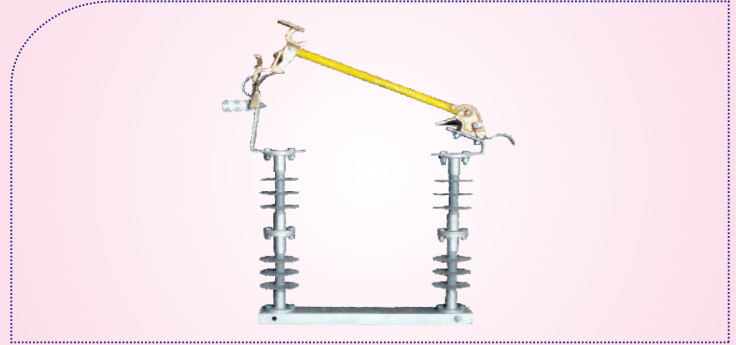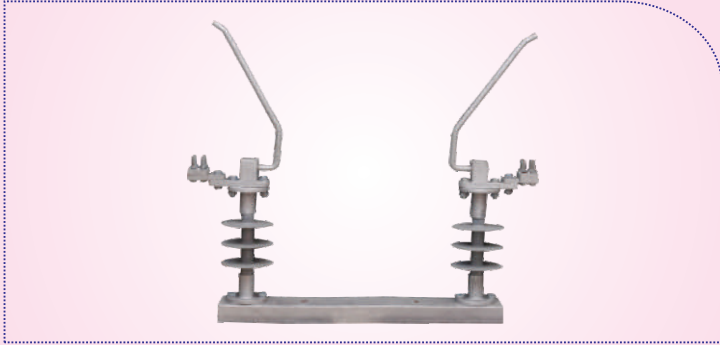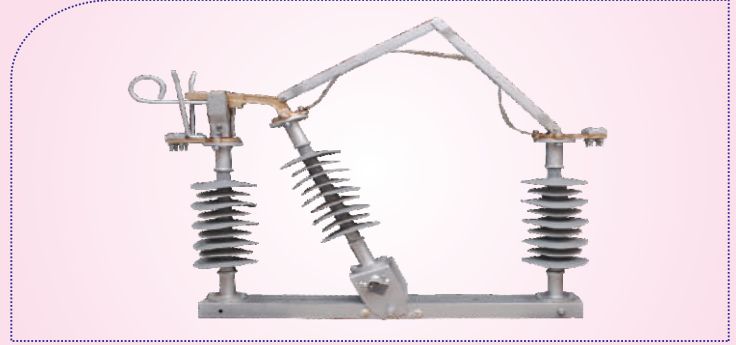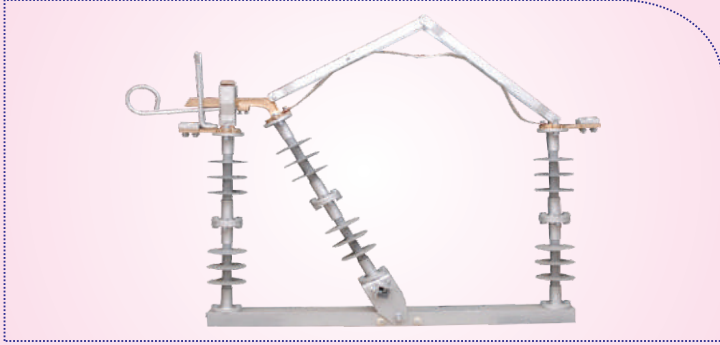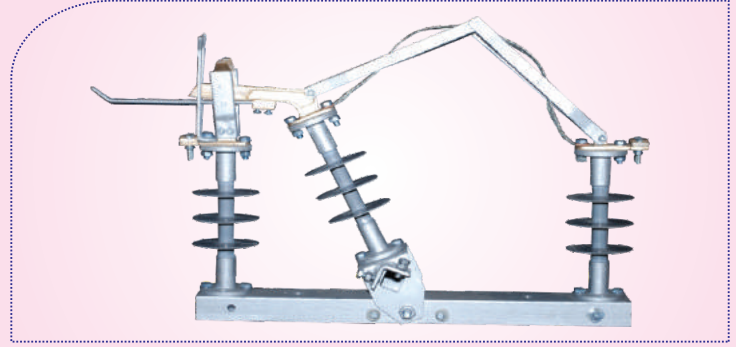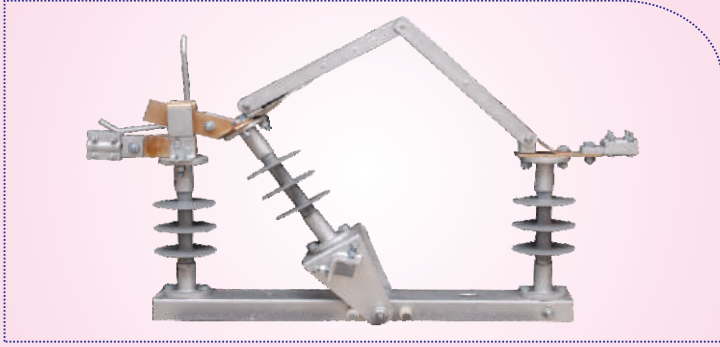

Silicone (Polymer) - Advantage


The silicone version of insulators offers distinct advantages over conventional porcelain insulators as follows :

- Light weight, compact and tower structures can be lighter resulting in economy.
- Hydrophobic & high pollution resistant.
- Fire retardant; Impact & vandal resistant.
- Un-breakable & reduces the risk of transport damages.
- Resistant to earthquake shocks.
- Reliable & safe mechanical performance.

“NATIONAL” The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.

AB CABLE HARDWARE

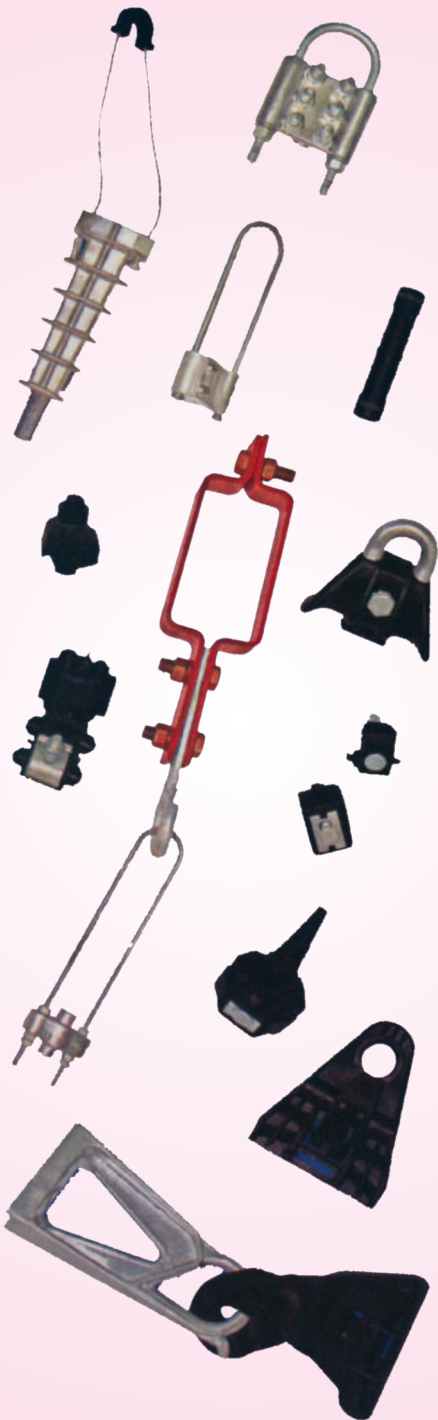

LINE HARDWARE



SUBSTATION CLAMP & CONNECTORS



We have been awarded with the **7 National**
and **3 International** award for Best **Quality** and **Management**

“NATIONAL” The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.

(Vyas Group Of Companies)

- NSIC - CRISIL RATting : SE 3 B
- NSIC - ICRA RATting : SE 3 B
- C E MARKED PRODUCT

MANUFACTURERS, EXPORTER & ENGINEERS

- * Load Break Switch
- * Overhead Line Material
- * Hightension Switchgears
- * Earthing Materials
- * Sub-Station Equipments,
- * Street Light Pole

Regd. Office : : 1885, Pada Pole, Gandhi Road, Ahmedabad-380 001.
Administration Office : "National House" 1885, Pada Pole, Gandhi Road, Ahmedabad-380001. Gujarat (India)
Factory (1) : Plot No.8/1, Sanket Industrial Estate, Village-Moraiya, (Changodar)Sarkhej-Bawla Highway, Tal.-Sanand, Dist-Ahmedabad-382213. Gujarat, (India) Ph. 02717-297827
Factory (2) : 34/45, Sonal Industrial Estate, At & Post-Khoda, Nr. TATA Nano, Tal. Sanand. Pin. 382170. Gujarat, India
Tele/Fax : 079-22139725-22169725
Mobile : Jayant : +91 9879559725 • Kaushik : +91 9879529725
E-mail : jayant1885@gmail.com, national9725@gmail.com, kgvyas33@gmail.com
Website : www.electrooverhead.com, www.nationalpower.in

EARTHING ELECTRODE

<i>National</i> SAFE EARTHING ELECTRODE	TRADITIONAL EARTHING SYSTEM
Pipe-in-pipe technology, two mild steel pipes one inside the other, hot dip galvanized, filled with high conductive and corrosion resistance crystalline mixture and backfill compound around electrode	Copper plate earthing inclusive of MS pipe, 50 mm dia, 2.75 meter long, copper plate 450 X 450 X 3 mm with copper strip 25 X 3 (6 bags) plus charcoal and salt around electrode. Oxidation takes place. Resistance to dissipation increase when corrosion starts.
Two models available: 50mm dia 3 meters is used in place of the conventional GI pipe earthing. 76mm dia, 3 meter is used in the place of the conventional copper plate earthing	GI pipe electrode earthing: 5 to 10 micron galvanization size: 65mm or 38 mm X 2.75 m long plus charcoal & salt etc. Pipe corrodes fast over a period of 3 years causing high resistance to smooth dissipation of current
Backfill compound is used as in fill material. BFC retains moisture and enhances conduction around electrode	Charcoal & salt are used in the pit as in fill material. Common salt hastens corrosion of GI/CI electrodes and the resistance value goes over a period of time.
Watering around the earth pit is required for about 3 days after installation and for a few days in peak summer when water tables go down	Watering of pit required regularly to enhance conductivity around the electrode
Ohmic value always within safe limits	Ohmic value fluctuates resulting in frequent maintenance of costly machinery and appliances and danger to human life
Maintenance of pit is not required in normal soil conditions	Sometimes fails to activate safety devices.
Low enough impedance to activate fault relays. Due to high conductive soil around the electrode, charge dissipation through electrode is very high, current density across electrode is very low, which results in very high fault current enough to trip fault relays	Distribution of short circuit is less in terms of charge dissipation and therefore generates high potential at the pit resulting in low fault current, insufficient to trip fault protection relays.
Always provide safe discharge path to fault current and lightning current	Some times fails to provide safe discharge path for fault current
Requires less space and time for installation	Requires large space and time for installation
Practically no need to change during life time	GI pipe earthing needs to be changed every three years and copper plate earthing every 12 years due to corrosion attacks
Backfill Compound (BFC) is not soluble in water. It is an excellent ground enhancer	Salt as in fill materials is washed away during season
Very Safe Stable Platform for electronic machinery, equipment and appliance.	Not a stable platform for sensitive electronic equipment and appliances
Can easily cope with the earthing demands of the new generation electrical/electronic machine	Can't cope with the earthing demands of the new generation machines
Cost effective investment	The cost of maintenance over a 15 plus year period will be about three times more than the one time cost of Electroearth's Safe Earthing Electrode



As Per IS 3043 - 1987



"NATIONAL" The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.

(Vyas Group Of Companies)

- NSIC - CRISIL RATting : SE 3 B
- NSIC - ICRA RATting : SE 3 B
- C E MARKED PRODUCT

MANUFACTURERS, EXPORTER & ENGINEERS

- * Load Break Switch
- * Overhead Line Material
- * Hightension Switchgears
- * Earthing Materials
- * Sub-Station Equipments,
- * Street Light Pole

Regd. Office : : 1885, Pada Pole, Gandhi Road, Ahmedabad-380 001.

Administration Office : "National House" 1885, Pada Pole, Gandhi Road, Ahmedabad-380001. Gujarat (India)

Unit (1) : Plot No.8/1, Sanket Industrial Estate, Village-Moraiya, (Changodar)Sarkhej-Bawla Highway, Tal.-Sanand, Dist-Ahmedabad-382213. Gujarat, (India) Ph. 02717-297827

Unit (2) : 34/45, Sonal Industrial Estate, At & Post-Khoda, Nr. TATA Nano, Tal. Sanand. Pin. 382170. Gujarat, India

Tele/Fax : 079-22139725-22169725

Mobile : Jayant : +91 9879559725 • Kaushik : +91 9879529725

E-mail : jayant1885@gmail.com, national9725@gmail.com, kgvyas33@gmail.com

Website : www.powergridswitchgears.com

EARTHING ELECTRODE

PURPOSE :

To eliminate electrostatic discharge to save sensitive equipments and to avoid disturbance in Power supply by providing effective earthing- the most important aspect in electrical industry.

BENEFITS :

Earthing electrode is easily installed with less space required as compared to conventional earthing and yet has a longer life. Earthing powder which surrounds earthing electrode is hygroscopic and conductive which helps the longer period of effective earthing . Earthing powder has the quality of absorbing and retaining moisture contents for a very long period. Very low resistance value ensures safe and sound earthing.

FEATURES :

Hot dipped galvanised strip in G. I. Pipe where G. I. Strip is primary and G. I. Pipe is outer and Secondary electrode. G. I. Strip helps smooth flow of current. The space between G. I. strip and G. I. pipe is filled with the powder which has conductive and non - corrosive elements which helps longer life of electrode. Earthing terminal is provided directly with primary electrode of G. I. strip which ensures proper earthing. Strip earthing is better than pipe earthing or plate earthing. We have benefits of both strip earthing and pipe earthing.


Available Size in Ready Stock.

Diameter : 32mm, 40mm, 50mm, 65mm, 80mm

Length : 1mtr., 2mtr., 3mtr.



As Per IS 3043 - 1987
HOT DIP COPPER COATED

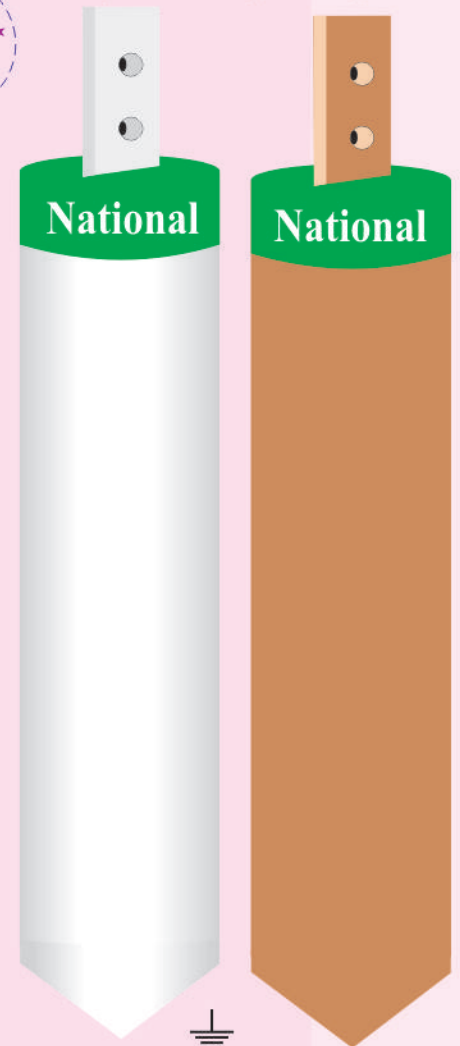

**EASY
INSTALLATION**

**MAINTANANCE
FREE**

LONG LIFE

**EFFECTIVE
EARTHING**


“NATIONAL” The Name of Quality

EARTHING ELECTRODE

CODE	G. I. Pipe O. D. & Length Approx.	Plate size in M.M.	Pipe Thickness	Total Weight Approx	Cross Sectional Primary Conducting Area in Sq. M.M.	Surface Area In M.M. For 3 Mtrs.	Suggested Load Approx
N-502	50mm x 2Mtr.	32 x 10	3 mm	15 Kg.	320	3,80,000	100 KVA
N-503	50mm x 3Mtr.	32 x 10	3 mm	22 Kg.	320	3,80,000	250 KVA
N-802	80mm X 2Mtr.	50 x 10	3 mm	24 Kg.	500	5,60,000	500 KVA
N-803	80mm x 3Mtr.	50 x 10	3 mm	35 Kg.	500	5,60,000	1000 KVA

Earthing Electrode


As Per IS 3043 - 1987

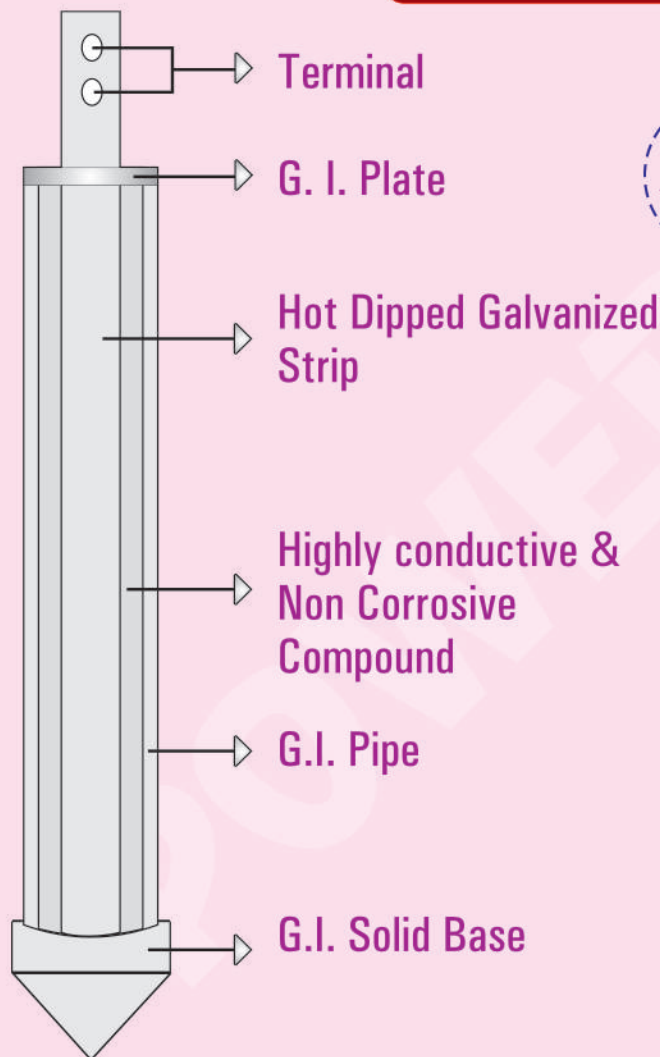

HOTDIP



COPPER
COTED



"NATIONAL" The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.

(Vyas Group Of Companies)

MANUFACTURERS, EXPORTER & ENGINEERS

- NSIC - CRISIL RATTING : SE 3 B
- NSIC - ICRA RATTING : SE 3 B
- C E MARKED PRODUCT

- * Load Break Switch
- * Overhead Line Material
- * Hightension Switchgears
- * Earthing Materials
- * Sub-Station Equipments,
- * Street Light Pole

Regd. Office : : 1885, Pada Pole, Gandhi Road, Ahmedabad-380 001.

Administration Office : "National House" 1885, Pada Pole, Gandhi Road, Ahmedabad-380001. Gujarat (India)

Factory (1) : Plot No.8/1, Sanket Industrial Estate, Village-Moraiya, (Changodar)Sarkhej-Bawla Highway, Tal.-Sanand, Dist-Ahmedabad-382213. Gujarat, (India) Ph. 02717-297827

Factory (2) : 34/45, Sonal Industrial Estate, At & Post-Khoda, Nr. TATA Nano, Tal. Sanand. Pin. 382170. Gujarat, India

Tele/Fax : 079-22139725-22169725

Mobile : Jayant : +91 9879559725 • Kaushik : +91 9879529725

E-mail : jayant1885@gmail.com, national9725@gmail.com, kgvyas33@gmail.com

Website : www.electrooverhead.com, www.nationalpower.in



11/22/33 KV DP Structure

11/22/33 KV Load Break Switch



**STRUCTURE
REPLACE WITH
LBS**

LBS Panels V/S DP Structure

Disadvantages of DP Structure (Only Outdoor)	Advantage of LBS Panel (Indoor as well as outdoor versions available)
Live parts are exposed to sun and rain leading to corrosion	LBS Panels are mounted in Metal Clad Enclosure. No Exposure to Sun and rain-No corrosion.
Rusting of moving parts leading to jamming	No rusting
Drop in insulation values of Insulators due to moisture	Immune to atmospheric conditions.
Loosening of Jumps leading to heat dissipation	No cable / Conductor joints. Complete bus bar system.
Manual operation	Manual / Motorized operation.
No Trip mechanism on fault	Trip Mechanism with back-up HRC Fuses.
Ugly structures within beautiful campus	Elegant Panel
Occupies precious floor space.	Compact in construction. No Land Wastage.
High Maintenance	Zero Maintenance.

"NATIONAL" The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.

Load Break Switch Panel

11 KV HT LBS PANEL(INDOOR / OUTDOOR)

- ❖ Load break switch 630A, 26.3KA. IS 9920/IEC 60265
- ❖ HT HRC fuses of suitable rating
- ❖ The insulation level is 12/28/85KV
- ❖ Auxiliary switch In Built
- ❖ Earth & Fuse Trip In Built
- ❖ Shunt trip coil In Built
- ❖ Tamper proof



Metering & Switching Panel

11 KV HT METERING & SWITCHING PANEL(INDOOR/ OUTDOOR)
IS3427/1997 RA2007 IEC62271-100/2001



- ❖ Load break switch 630A.26.3KA
- ❖ HT HRC fuses of suitable rating (access to the HT fuse chamber is possible only after switching OFF the LBS)
- ❖ The Instrumental Current Transformer (resin cast) CL : 0.5 confirms to IS : 2705. The insulation level IS 15/35/95kv.
- ❖ The Potential Transformer (resin cast) CI: 0.5 confirms to IS : 3156. The insulation level IS 15/35/95KV.
- ❖ The Electronic Trivector Meter CL 0.5
- ❖ The Terminal Block 3ph. 3wire front connection
- ❖ Sealing facility provided as per EB Rules.
- ❖ Tamper proof.



We have been awarded with the
7 National and 3 International
award for Best Quality and Management

“NATIONAL” The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.

(Vyas Group Of Companies)

- NSIC - CRISIL RATting : SE 3 B
- NSIC - ICRA RATting : SE 3 B
- C E MARKED PRODUCT

MANUFACTURERS, EXPORTER & ENGINEERS

- * Load Break Switch
- * Overhead Line Material
- * Hightension Switchgears
- * Earthing Materials
- * Sub-Station Equipments,
- * Street Light Pole

Regd. Office : : 1885, Pada Pole, Gandhi Road, Ahmedabad-380 001.

Administration Office : "National House" 1885, Pada Pole, Gandhi Road, Ahmedabad-380001. Gujarat (India)

Factory (1) : Plot No.8/1, Sanket Industrial Estate, Village-Moraiya, (Changodar) Sarkhej-Bawla Highway, Tal.-Sanand, Dist-Ahmedabad-382213. Gujarat, (India) Ph. 02717-297827

Factory (2) : 34/45, Sonal Industrial Estate, At & Post-Khoda, Nr. TATA Nano, Tal. Sanand. Pin. 382170. Gujarat, India





Tele/Fax : 079-22139725-22169725

Mobile : Jayant : +91 9879559725 • Kaushik : +91 9879529725

E-mail : jayant1885@gmail.com, national9725@gmail.com, kgvyas33@gmail.com

Website : www.electroverhead.com, www.nationalpower.in


Load Break Switch Panel

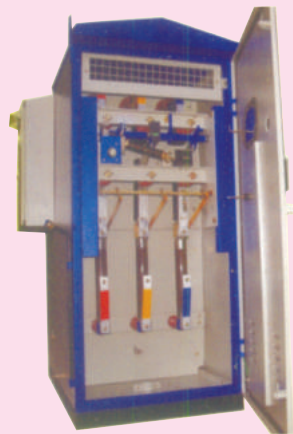

"NATIONAL" The Name of Quality











NATIONAL POWER INDUSTRIES

(Composite Insulator) (Suspension - Pillar - Pin - Post)

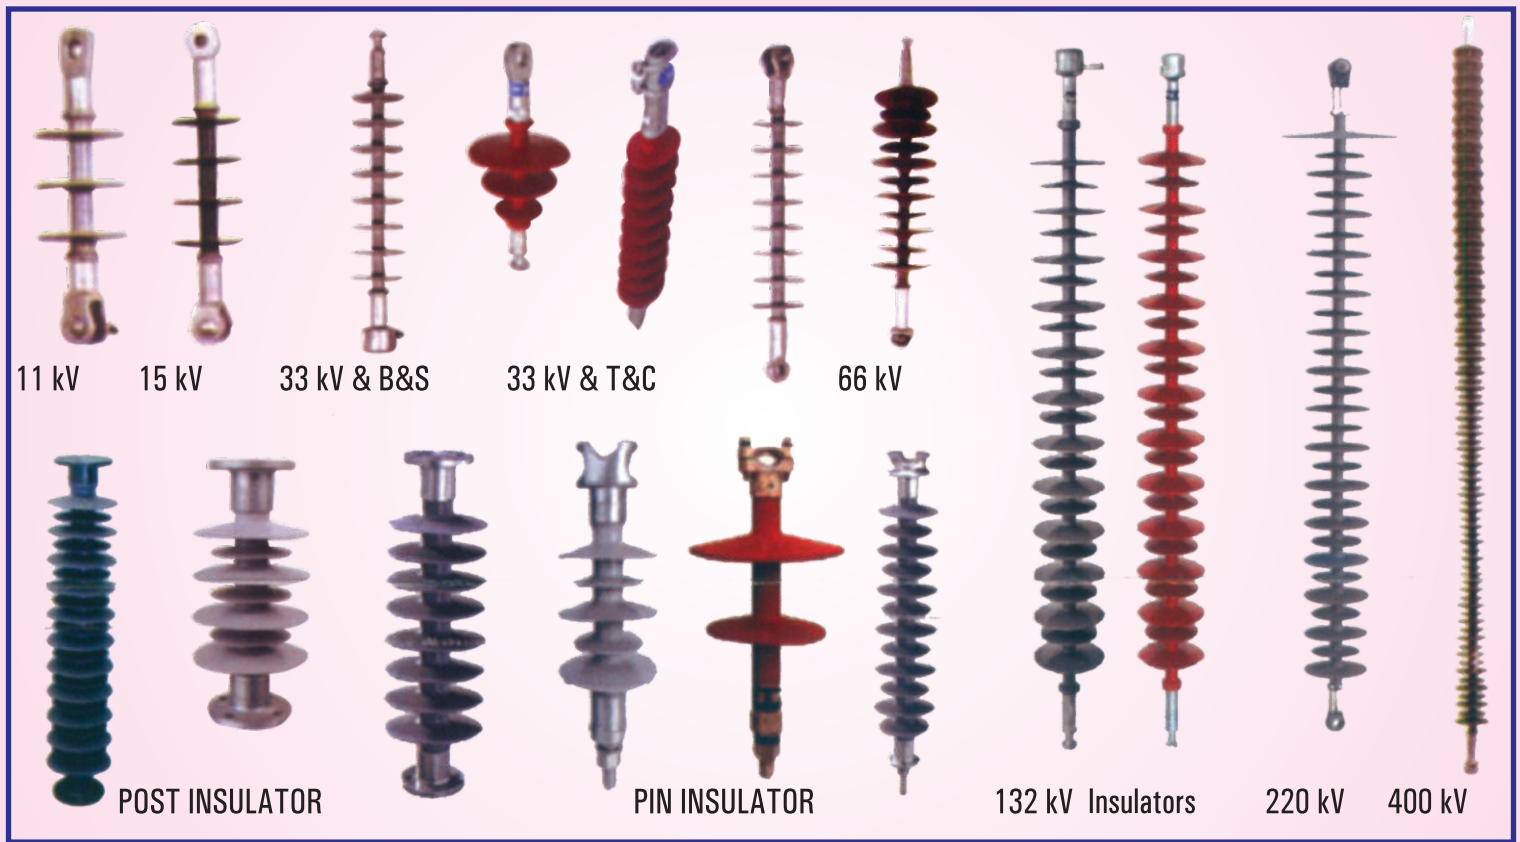

“NATIONAL” The Name of Quality

POWER-GRID SWITCHGEARS PVT. LTD.



“NATIONAL” The Name of Quality

ISO 9001 : 2008 CERTIFIED COMPANY

POWER-GRID SWITCHGEARS PVT. LTD.


(Vyas Group Of Companies)

- **NSIC - CRISIL RATTING : SE 3 B**
- **NSIC - ICRA RATTING : SE 3 B**
- **C E MARKED PRODUCT**

MANUFACTURERS, EXPORTER & ENGINEERS

- * Load Break Switch
- * Overhead Line Material
- * Hightension Switchgears
- * Earthing Materials
- * Sub-Station Equipments,
- * Street Light Pole

Regd. Office : : 1885, Pada Pole, Gandhi Road, Ahmedabad-380 001.
Administration Office : "National House" 1885, Pada Pole, Gandhi Road, Ahmedabad-380001. Gujarat (India)
Factory (1) : Plot No.8/1, Sanket Industrial Estate, Village-Moraiya, (Changodar)Sarkhej-Bawla Highway, Tal.-Sanand, Dist-Ahmedabad-382213. Gujarat, (India) Ph. 02717-297827
Factory (2) : 34/45, Sonal Industrial Estate, At & Post-Khoda, Nr. TATA Nano, Tal. Sanand. Pin. 382170. Gujarat, India
Tele/Fax : 079-22139725-22169725
Mobile : Jayant : +91 9879559725 • Kaushik : +91 9879529725
E-mail : jayant1885@gmail.com, national9725@gmail.com, kgvyas33@gmail.com
Website : www.electrooverhead.com, www.nationalpower.in

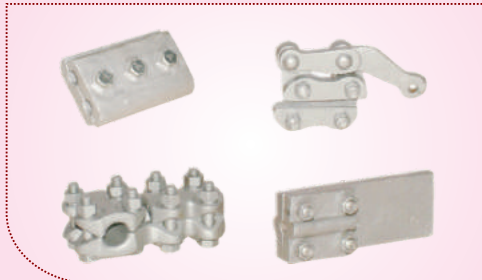

Cable Jointing Kit

"NATIONAL" The Name of Quality